

SLIM LINE SERIES

GRAVITY SOFT SERVE FREEZER

TWIN TWIST

Model SL500

The slim line model SL500 will dispense two separate flavors or an equal combination of both flavors. High quality frozen treats from low-fat, nonfat, sugar free ice cream to yogurt, custard and sorbet. This exclusive Electro Freeze design is simple to operate and easy to clean.

Unique Features

Dispensing Head

Made of the finest insulating materials. Easy pull down self closing dispensing handles.

Freezing Cylinders

Two 3.7 quart (3.5 L) cylinders, 10,000 BTU/hr compressor permits fast freeze down, quick recovery and increased production.

Two 16-Quart Mix Hoppers

Separate hopper refrigeration maintains mix below 41°F (5°C) during auto and night mode operation.

Beater Blades

Durable polymer, long wearing, nonreversible blades.

Night Switch

Provides safe controlled refrigeration of product during night or any nonbusiness period...reduced energy consumption...maintains product quality.

Mix Level Indicator

Flashing light automatically tells operator when mix is needed.

Experience Tells

Electro Freeze has over 75 years of experience manufacturing quality frozen treat machines. This is evident in the superior engineering, sturdy construction, quality craftsman and dependable performance of every Electro Freeze freezer.




Model SL500

Sweet Choices![™]

ELECTRO FREEZE

ELECTRO FREEZE®

PLUMBING AND ELECTRICAL CONNECTIONS

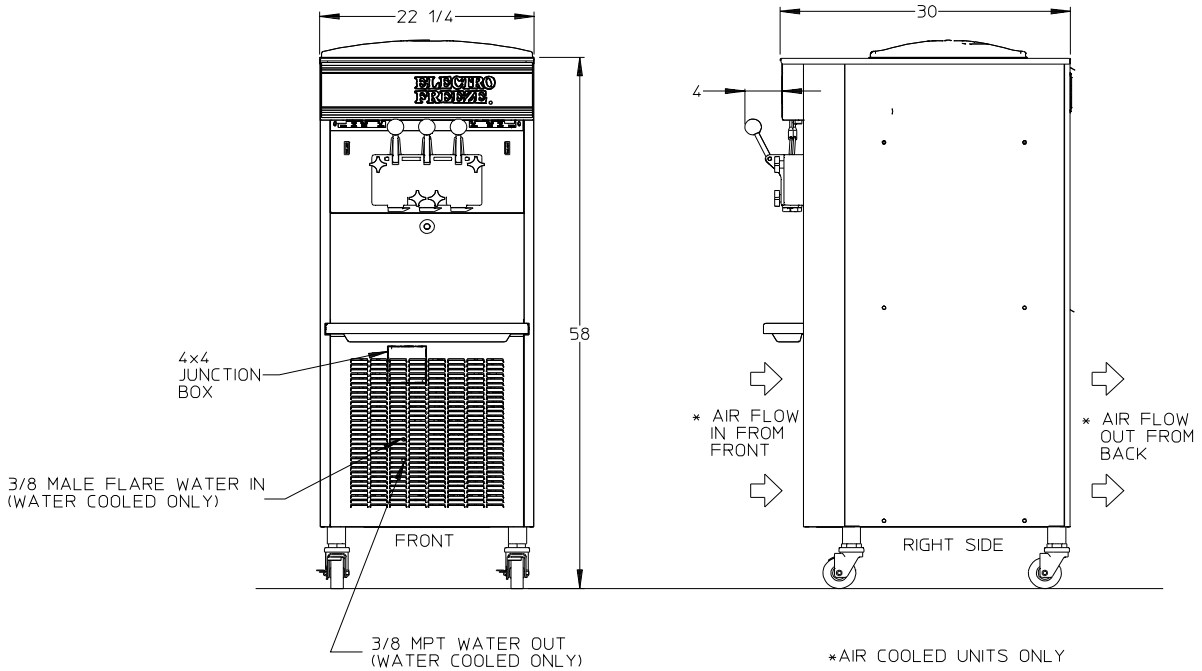

MODEL SL500

SPECIFICATIONS

All Specifications subject to change without notice. Check nameplate for exact electrical data.

MODEL NO.	MOTOR H.P.		DIMENSIONS			NET WT.	TOTAL AMPS			
	Beater	Compressor Cylinder	D.	W.	H.		1 Phase Water	1 Phase Air	3 Phase Water	3 Phase Air
SL500	TWO 2 HP	10,000 BTU/hr 2.0 HP	30" 76 CM	22.25 56.5 CM	58" 147 CM	539 LB 244 KG	30.7	32	23.4	24.7
		Compressor Hopper 500 BTU/hr 1/10 HP					MINIMUM CIRCUIT AMPS			
							34.0	35.5	26.0	27.5
							MAX FUSE SIZE/HACR CIRCUIT BREAKER			
							40	40	30	30

Self contained air or water cooled.
 One dedicated electrical connection required.
 Standard Wiring - 208/230 volt, 60 HZ, Single Phase - 2 wire
 208/230 volt, 60 HZ, Three Phase - 3 wire
 Refrigerant - cylinder 404a; hopper 134a
 Electrical characteristics other than above available on request from sales office

Authorized Distributor

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: _____
 Options: _____

division of H.C. DUKE & SON, INC.

2116-8th Avenue, East Moline, Illinois 61244
 Phone (309) 755-4553 • (800) 755-4545
 FAX (309) 755-9858
 E-mail: sales@electrofreeze.com • www. electrofreeze.com

Safety and sanitation agency listings pending.